



Gas Sensors - A Review

S. Karthikeyan^{1*}, Haresh M. Pandya², M. U. Sharma³, K. Gopal⁴

^{1*}Department of Chemistry, Chikkanna Government Arts College, Tiruppur, TN, India.

²Department of Physics, Chikkanna Government Arts College, Tiruppur, TN, India.

³Defence Scientist (DRDO), Solid State Physics Laboratory, New Delhi, India.

⁴Department of Chemistry, Erode Arts & Science College, Erode, TN, India.

Received: 15.10.2015 Accepted: 18.11.2015 Published: 30-12-2015

Abstract

Chemical sensors for specific species with varying sensitivity levels are commercially available. Common chemical sensors differ in terms of the sensing material and the nature of property change such as electrical conductivity, optical characteristics and temperature. Some of the current sensor technologies include high temperature oxide thin-film sensors, polymer based sensors, catalytic based sensors and surface acoustic wave (SAW) sensors are described. In this the sensor array consists of Carbon Nano Tube (CNT) as sensing material and an interdigitated electrode as a transducer is described. The gas sensors fabricated by using conducting polymers such as polyaniline, polypyrrole as the active layers have been reviewed. The macroscopic coaxial carbon cylinders consisting of aligned CNT stacks have been used in CNT- polymer composite. The advantages and disadvantages of each sensor technology are also highlighted. All these technologies have been used for the development of highly sensitive and responsive gas sensors for the detection of flammable and hazardous gases. However, for improved sensitivity and selectivity for these sensors, future trends and outlook for researchers are suggested in this review.

Keywords: CNT; Combustible gas; Gas sensor; Sensitivity; SAW.

1. INTRODUCTION

The air surrounding us contains different amount of gases which could be hazardous to human health, atmospheric pollutants or of significance to an industrial or medical process. It becomes therefore very imperative to detect the presence of these gases since the environment we dwell in consists of humans, plants and animals as its main inhabitants, so the safety of their lives is of topmost priority. Gas sensors are chemical sensors that are of paramount importance. A chemical sensor comprises of a transducer and an active layer for converting the chemical information into another form of electronic signal like frequency change, current change or voltage change for many centuries, different gas sensor technologies have been used for different gases detection including semiconductor gas sensors, catalytic gas sensors, electrochemical gas sensors, optical gas sensors and acoustic gas sensors. The performance characteristic of every sensor is based on some properties including sensitivity, selectivity, detection limit, response time and recovery time. Other factors that makes a sensor more attractive to consumers include small size, low power consumption and capability of being wireless.

2. DIFFERENT TYPES OF GAS SENSORS

2.1 Catalytic Sensor

The first catalytic combustion type sensor was discovered by Jonson in 1923 (Firth *et al.* 1973; Jones,

1987) and was used for the detection of methane in mines. This type of sensors usually contains a catalytic surface coated on a hot plate with Pt resistor that heats up the catalyst to a very high temperature at which any flammable gas molecules can ignite. The concentrations of gases can be detected by monitoring resistance change of the platinum resistance arising from increase in temperature. This design was recently developed by Li and Lie Xu *et al.* (2012) in which they design and fabricate a two-beam microplate for catalytic gas sensors.

2.1.1 Pellistors-type catalytic gas sensor

The term pellistor is the combination of 'pellet' and 'resistor'. The sensing elements consist of small pellets of catalyst loaded ceramic whose resistance changes in the presence of the target gas. A Pellistors-type catalytic gas sensor consists of two platinum coils which serve as heater as well as resistance thermometer. It also consists of active and inactive beads. The active bead is activated with catalyst made from a metal like platinum or palladium. The inactive bead has no catalyst but usually acts as compensating elements. A voltage supply use for powering the circuit heats up the coils so that the beads are raised to a high temperature from a range of 300 °C to 500 °C depending on the target gas. This causes the gas to ignite and raises the temperature of the detector coil as shown in Fig. 1.

*S. Karthikeyan Tel. no:+919442264501

Email: environkarthi@gmail.com



Table 1. Types of gas sensors

S.No	Sensor Type	Advantages	Disadvantages
1	Catalytic	Simple, measures flammability of gases and low cost technology	Requires air or oxygen to work. can be poisoned by lead, chlorine and silicones
2	Thermal	Robust but simple construction. Easy to operate in absence of oxygen. Measuring range is very wide.	Reaction due to heating wire.
3	Electro-Chemical	Measures toxic gases in relatively low concentrations. Wide range of gases can be detected	Failures modes are unrevealed unless advanced monitoring technique used.
4	Optical	Easy to operate in absence of oxygen. Not affected by electromagnetic interference. Monitoring area is very wide.	Affected by ambient light interference.
5	Infrared	Uses only physical technique. No unseen failure modes. Can be used in inert atmospheres.	Not all gases have IR absorption. Sequential monitoring is slower on multi point analyzers and also more user expertise required.
6	Semi-Conductors	Mechanically robust, works well at constant high humidity condition.	Susceptible to contaminants and changes due to environmental conditions. Non-linear response effects complexity.
7	Surface Acoustic Wave	Detect nerve and blister agents Battery-less and could be used for wireless applications. Could be placed in harsh and rotating parts	Due to its small size there is difficulty in handling during fabrication process.

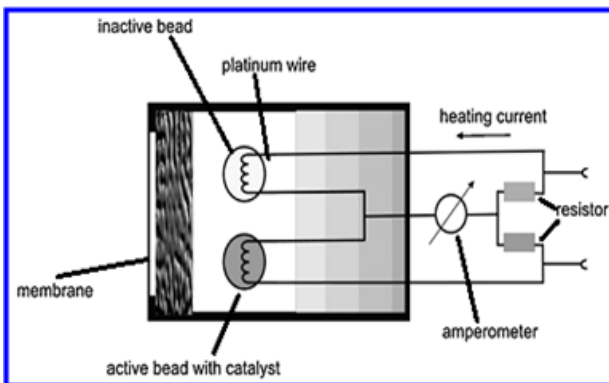


Fig. 1: Pellistor-type gas sensor (Hubert et al. 2011)

This rise in temperature increases the coil resistance and causes an imbalance in the voltage of the Wheatstone bridge which constitutes the sensor signal. These sensors are always manufactured in pairs, the active catalyzed element being supplied with an electrically matched element which contains no catalyst and is treated to ensure that no gas will oxidize on its surface. This “compensator” element is used as a reference resistance to which the sensor’s signal is compared to remove the effects of environmental factors other than the presence of a flammable gas. The pellistors are capable of detecting various combustible vapours and flammable gases at concentration as low as 500 ppm with relatively fast response times.

A Review was made by Hubert et al. (2011) on Hydrogen gas sensors. Recent researches as reported by Lei Xu et al. (2010) developed catalytic combustion type

methane detection sensor with a Pd-Pt catalyst working on pulse voltage mode. Eui-Bok et al. (2011) recently developed an integrated catalytic combustion H₂ sensor using MEMS technology.

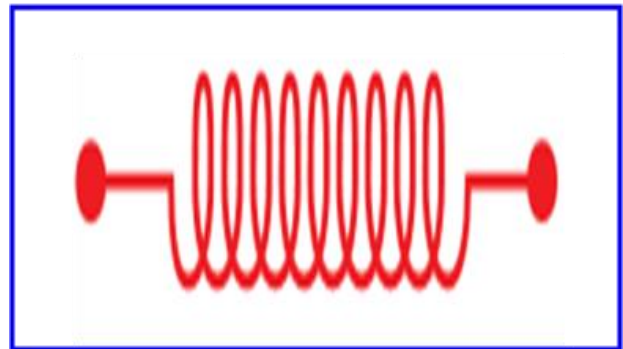


Fig. 1(a): Hot Wire Sensor (Xu et al. 2010)

The major advantages of catalytic detectors:

- Simple to operate.
- Easy to install, calibrate and use.
- Long life with a low replacement cost.
- Proven technology with exceptional reliability and predictability.
- Easily calibrated individually to gases such as hydrogen which cannot be detected using infrared absorption.
- Can perform more reliably in dusty & dirty atmospheres as they are not as sensitive as optics to the buildup of industrial contaminants.
- Can perform more reliably in high temperature applications.

Typical Toxic gas electrochemical sensor specification is given below,

Sensors type	: 2 or 3 electrodes; mostly 3 electrodes
Range	: 2-10 times permissible exposure limit
Life expect	: 12 to 24 months normal; depends on manufacturer and sensor
Temp. range	: -40 °C to +45 °C
Relative humidity	: 15-95% non-condensing
Response time T80	: < 50 s.
Long term drift	: drift down 2% per month

The following factors are the disadvantages for this type of sensor,

- While this technology is somewhat specific, other common gases will react at different levels and be detected, resulting in false positives and false alarms.
- These sensors have a limited lifetime and deplete over a period of time.
- The depletion rate is primarily determined by the sensor's exposure to the reactant gases.
- Deciding when to recalibrate these sensors to maintain a specific accuracy can be a problem.
- On average, most equipment manufacturers using electrochemical sensors recommend recalibration every three months, but this is influenced by the sensor's reactant gas exposure and the required accuracy level. Electrochemical sensors will also degrade when exposed to high humidity conditions.

2.3.1 Amperometric gas sensor

The Amperometric sensors work at a constant applied voltage and the sensor signal is a diffusion limited current. It usually consists of two electrodes, the working electrode and the counter electrode and also a reference electrode which are immersed in the electrolyte solution and a potentiostat for maintaining constant voltage shown in Fig. 3. (RTILs– Room temperature Ionic Liquids). Amperometric sensors have been used for detecting various gases by changing the type of electrolyte.

Kuo-Chuan Ho and Wen- Tung Hung (2001) developed an amperometric NO₂ gas sensor based on Pt/Nafion electrode, NO₂ concentrations in the range of 0 to 485 ppm were detected. Similarly an amperometric hydrogen sensor was developed based on polymer electrolyte membrane with Nafion membrane as the conducting polymer. The response to hydrogen concentration was in the range of 260 to 11,500 ppm Yente Chao et al. (2005) developed an amperometric sensor using 3 different sensor designs for hydrogen and carbon monoxide sensing.

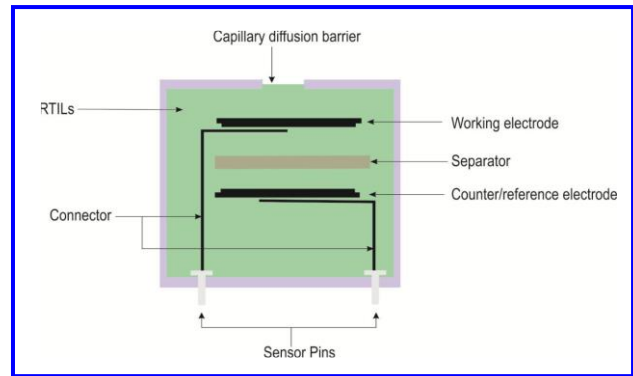


Fig. 3: Proposed membrane-free gas detector

An amperometric gas sensor for the detection of hydrocarbon was reported by Dutta et al. (2005) for monitoring in exhaust pipes. Microamperometric sensors dated back in the 1980's consisted only of microfabricated electrodes on a suitable substrate, the earliest microamperometric sensor was developed by Sleszynski and Osteryoung (1984). Recently, techniques on how to improve the sensitivity of the sensors were reported by (La et al. 2011; Lee et al. 2001).

2.3.2 Potentiometric gas sensor

Potentiometric gas sensors are used to determine the analytical concentration of some components of the analyte gas. They can measure the electrical potential of an electrode without current flow. Potentiometric sensors have been used for oxygen detection. These sensors usually operate between 600 °C and 1000 °C. The electrodes are usually made from Palladium, Platinum, gold or silver. The oxygen chemical potential of the reference electrode can be fixed by known oxygen partial pressure (Gaseous reference electrode) or by a mixture of the transition metal and its oxide (Solid reference electrode) (Radhakrishnan et al. 2005). A typical oxygen potentiometric sensor consists of an oxygen ion conducting solid electrolyte and two electrodes deposited on the two sides of the electrolyte (Fig. 4) (Radhakrishnan et al. 2005).

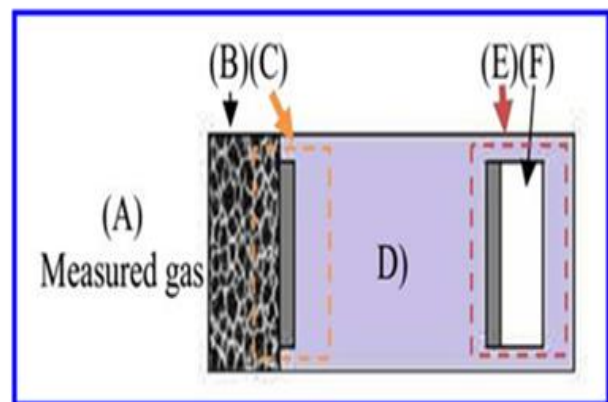


Fig. 4: Schematic structure of a potentiometric planar oxygen Lambda sensor (Radhakrishnan et al. 2005)

Where, (A) - measured atmosphere, (B) - porous protective layer (it is optional), (C) - sensing electrode,

(D) - O₂-ion-conductive ceramic electrolyte, (E) - reference electrode exposed to (F) ambient air atmosphere.

Lee et al. (2001) developed a potentiometric CO₂ gas sensor using lithium phosphorus oxynitride electrolyte while recently Jiun-Chan Yang et al. (2010) developed a high temperature NO₂ sensor fabricated with asymmetric reference and sensing electrode made with Pt and YSZ electrolyte. Yongtie Yan et al. (1995) developed a potentiometric sensor using stabilized zirconia for chlorine gas by combining MgO-stabilized zirconia tube with an auxiliary phase containing metal chloride with a sensitivity of 1-100 ppm of chlorine at 550-600 °C. Radhakrishnan et al. (2005) fabricated a miniaturized series connected potentiometric sensor on a silicon fabricated electrodes on after using micro fabrication techniques for oxygen detection.

2.4 Optical Gas Sensor

This type of sensors uses optical absorption/emission scattering of a gas species at defined optical wavelengths. An optical gas sensor consists of a light emitting element, a photo detecting element, a gas sensing element, the gas sensing element responding to light. One of the most common optical gas sensors is infrared gas sensors.

The first optical hydrogen gas sensor was reported by Butler in 1984 which consists of an optical fiber with Palladium and Titanium coatings. Crawford Massie et al. (2006) also designed a low-cost portable optical sensor for methane detection with very good sensitivity.

Acquaroli et al. (2010) designed an optical porous silicon gas sensor. Manap et al. (2009) developed an optical fiber sensor for the monitoring of ammonia gas using an open optical path techniques. Cross sensitivity of CO₂ and O₂ was also tested to see their effect on ammonia gas. Okazaki et al. (2003) also developed a fiber optic hydrogen gas sensor using catalyst-supported tungsten trioxide (wo₃).

The sensor used platinum acid at 500 °C and showed good response towards hydrogen gas detection and can detect gas even at room temperature. Inaba et al. (1979) suggested the use of a dual-wavelength laser to realize a differential absorption method that could be used over many kilometers of low-loss optical fibre, provided that suitable gas absorption bands are present. This typically involves the comparison of the received power at two, or more, different wavelengths, each having passed through a remote measurement gas cell, so that the differential absorption of the gas sample could be used to infer the concentration of the target gas. Systems that developed this principle will be discussed (Kobayashi et al. 1981; Hordvik et al. 1983; Stueflotten et al. 1986). A schematic of the system developed by Hordvik et al. (1983) is shown in Fig. 5.

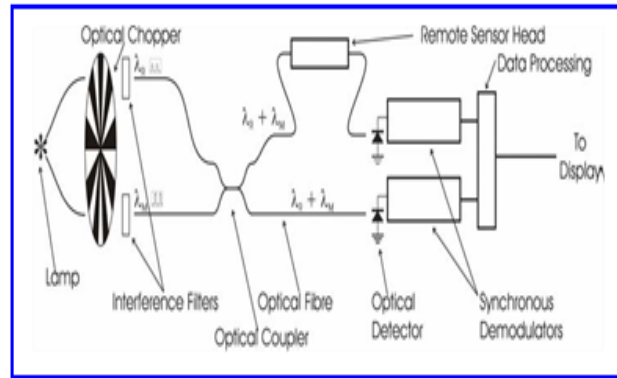


Fig. 5: Schematic of a differential fibre-optic detection system (Redrawn from diagram in Hordvik et al. 1983)

2.5 Infrared Gas Sensor

IR gas detection is a well-developed measurement technology. Infrared gas analyzers have a reputation for being complicated, cumbersome and expensive. However, recent technical advancements, including the availability of powerful amplifiers and associated electronic components, have opened a new frontier for infrared gas analysis. Infrared sensor consists of a detector which converts electromagnetic radiation energy into electrical signals. The Detectors are of different types namely: Thermoelectric, Thermistor Bolometer, Pyroelectric detector and Photon detector. Infrared gas sensors are used for detecting different gases like methane, ethane, propane, butane, benzene toluene, xylene and other alcohols like methanol, ethanol, etc. There are two types of optical structure which is used for the construction of infrared CO₂ gas sensors namely: time-double beam and space-double beams. The time-double beam optical structure has only one infrared beam emitted from the infrared source and the detector receives 2 infrared beams with different wavelengths and at different times while the space double beam structure has one infrared beam emitted from the infrared source and simultaneously enters two parallel plate detectors. In this design, the space double beam is used so as to enhance the construction and a cone-shaped air chamber is designed. As shown in Fig. 6.

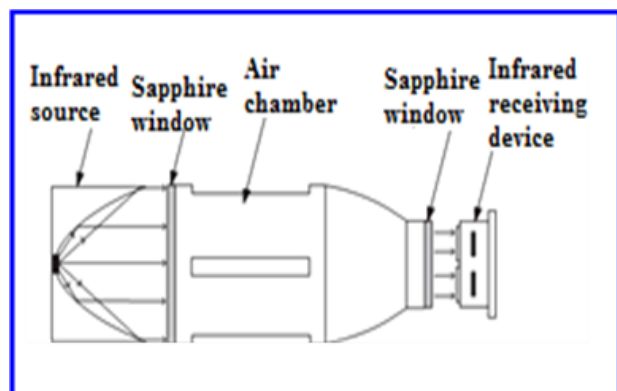


Fig. 6: Showing a structural optical probe (Okajima et al. 2006).

Okajima *et al.* (2006) developed an Infrared gas sensor using LED for the measurement of methane, absorption of gas samples between 0-97% were successfully measured, Garcia Romeo *et al.* (2012) developed a Non-Dispersive Infrared (NDIR) gas sensor for the measurement of CO₂ gas concentration Dong Chen *et al.* (2006) designed a tunable diode laser absorption spectroscopy for the measurement of hydrogen sulfide gas. In order to produce a sensor that is miniaturized, Guangjun Zhang *et al.* (2010) developed a miniaturized CO₂ sensor based on infrared absorption.

The sensor showed an accuracy of 0.026% with CO₂ gas concentration in the range of 0-3%. Naoya Kasai *et al.* (2011) investigated the ability of a system using a carbon infrared emitter and an Infrared camera to detect combustible gas propane.

The major advantages of IR gas detectors:

- Immunity to contamination and poisoning.
- Consumables (source and detector) tend to outlast catalytic sensors.
- Can be calibrated less often than a catalytic detector.
- Ability to operate in the absence of oxygen or in enriched oxygen.
- Ability to operate in continuous presence of gas.
- Can perform more reliably in varying flow conditions.
- Even when flooded with gas, will continue to show high reading and sensor will not be damaged.
- Able to detect at levels above 100% LEL.

The limiting factors in IR technology:

- The initial higher cost per point. IR detectors typically are more expensive than catalytic detectors at initial purchase.
- Higher spare parts cost.
- Gases that do not absorb IR energy (such as hydrogen) are not detectable.
- High humidity, dusty and/or corrosive field environments can increase IR detector maintenance costs.
- Temperature range for detector use is limited compared to catalytic detectors.
- May not perform well where multiple gases are present.

2.6 Semiconductor Sensor

They work on the principle of reversible gas adsorption process at the surface of the heated oxide usually oxides of tin deposited on a silicon slice by chemical vapor deposition method. A metal oxide semiconductor sensor is also known as taguchi sensor. The most widely used material is SnO₂ doped with small amounts of catalytic additives such as Pd or pt. The operating temperature for metal oxide semi conductor gas sensor is between 200 °C and 500 °C.

The heater at the base is used for heating up the sensor to a constant temperature of about 200-250 °C so as to speedup reaction rate. A p-type semiconductor is suitable for the detection of oxidizing gases. The oxides usually used for the n-type are mainly oxides: SnO₂.ZnO In 2O₃ or WO₃. They are commonly used to detect hydrogen, oxygen, alcohol and harmful gases like carbon monoxide. Gas sensors using metal oxide semiconductor were first proposed by Seiyama and Taguchi (1962). However, improved sensitivity could also be obtained by the addition of doping agent in thick film semiconductor gas sensor developed for the sensing of methane and butane.

Jin Huang and Qing Wan (2009) published a review paper on the progress in gas sensors based on semiconducting metal oxide one dimensional (1D) nanostructures.

The semiconductor gas sensors have different configurations, one-electrode and two electrode configuration. Absorptions of the sample gas on the oxide surface followed by catalytic oxidation results in a change of electrical resistance of the oxide material which is then related to the sample gas concentration which is monitored by the meter as shown in Fig. 7.

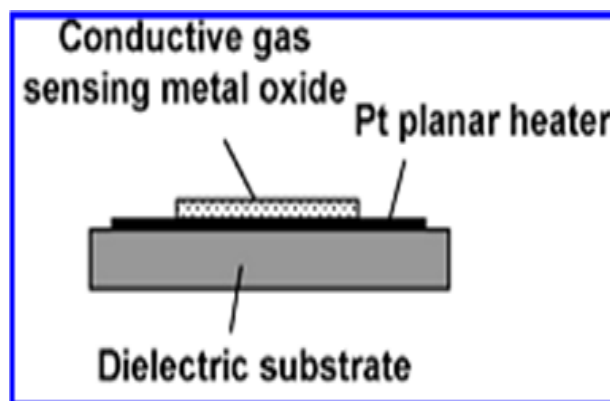


Fig. 7: Showing one electrode configuration of semiconductor gas sensor (Zhang *et al.* 2010)

Khodadadi *et al.* (2001) reported on improving the sensitivities of methane and carbon monoxide gases by adding 5% of K₂O into SnO₂ samples, the sensitivity was improved by 40%. Similarly, 5% of Na₂O in SnO₂ layers showed reduction of sensor sensitivity to CO. Addition of platinum into the prepared samples improves their response to methane. While addition of small amount of cerium oxide showed suppression of the sensor response to methane while maintaining sensitivity to CO.

The limiting factors are given below,

- MOS sensors will detect gases at lower ppm levels than electrochemical sensors.
- These sensors are less gas specific than electrochemical sensors and react with many types of gases, producing many more false positives and

false alarms. This can shut down equipment and, when used to measure toxic gases, can cause needless evacuation of personnel.

- MOS sensors are also extremely sensitive to humidity, which can affect the monitor's performance.

2.7 Acoustic Wave Gas Sensor

Acoustic wave sensors are so named because their detection mechanism is a mechanical, or acoustic, wave. The first acoustic gas sensor was discovered by King (1964) and was based on the measurement of bulk acoustic waves (BAW) in a piezoelectric quartz crystal resonator which is sensitive to mass changes. As the acoustic wave propagates through or on the surface of the material, any changes to the characteristics of the propagation path affect the velocity and/or amplitude of the wave. Changes in velocity can be monitored by measuring the frequency or phase characteristics of the sensor and can then be correlated to the corresponding physical quantity being measured. An acoustic wave sensor contains a receptor which is an element that is sensitive to an analyte and a transducer i.e. an element that converts the response into an electrical signal.

After intensive research studies in mid 1960's, chemical sensors for industrial atmospheric pollutants were developed. Since piezoelectric quartz resonators were used, these types of sensors were called quartz microbalances (QMB). There are different types of acoustic wave sensors which are based on the type of wave propagation.

Acoustic wave sensors have a variety of applications as in temperature, pressure, mass, chemical etc. acoustic wave sensors already possess this inherent characteristic and were used in gas sensors since 1964 so this makes it to be an attractive candidate over its gas sensing counterparts. A review on acoustic waves will be made in this section of the paper with emphasis on surface acoustic wave sensors. Another advantage of surface acoustic wave technology is that the gas sensing can be made wirelessly as shown by (Lim *et al.* 2011), which makes real online monitoring of the gas sensor. High selectivity and sensitivity have also been reported in many SAW gas sensing applications (Dutta *et al.* 2005; Yang and Dutta, 2010; Radhakrishnan *et al.* 2005).

2.7.1 Surface acoustic wave gas sensor

SAW sensors are developed based on Rayleigh waves. Surface acoustic wave sensors work based on the principle of transduction whereby the sensor converts an input electrical signal into a mechanical wave and reconverts back into electrical signal. The IDTs are made of electrodes made from either gold, aluminum or platinum. The principle of gas sensing in SAW is realized by the application of a sensing material like a thin polymer across the delay line which selectively absorbs the gas or gases of interest as depicted the

frequency of operation of Rayleigh waves sensors is usually lies between 40-600 MHz.

A standard design for a SAW device is shown in Fig. 8. A transmitter interdigital electrode (Interdigital transducers, IDTs) and a receptor interdigital electrode are attached onto a piezoelectric crystal. The polymer film is coated on the gap between these two electrodes. An input radio frequency voltage is applied across the transmitter IDTs, inducing deformations in the piezoelectric substrate. These deformations give rise to an acoustic wave, traversing the gap between two IDTs. When it reaches the receptor IDTs, the mechanics energy was converted back to radio Frequency voltage (Chang *et al.* 2000, Penza *et al.* 1998). The adsorption and desorption of gas on the polymer film on the gap will modulate the wave propagation characters. A phase or frequency shift will be recorded between the input and output voltages (Penza *et al.* 1998; Milella and Penza, 1998). The detect limits of above two types of devices are very low (<1 ppm).

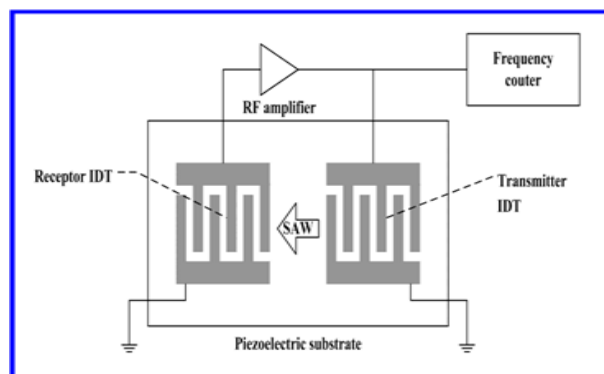


Fig. 8: Configuration of surface acoustic wave sensor device (Chang *et al.* 2000)

3. GAS SENSOR BASED ON CONDUCTING POLYMERS

Conducting polymers, such as polypyrrole, polyaniline, polythiophene and their derivatives, have been used as the active layers of gas sensors since early 1980 (Nylabder *et al.* 1983). In comparison with most of the commercially available sensors, based usually on metal oxides and operated at high temperatures, the sensors made of conducting polymers have many improved characteristics. They have high sensitivities and short response time. The conducting polymers mentioned in this review all refer (Dubbe *et al.* 2003; Zakrzewska *et al.* 2001; Timers *et al.* 2005) to intrinsic conducting polymers. Their main chains consist of alternative single and double bonds, which leads to broad π electron conjugation. The conductivity of these pure conducting polymers are rather low ($<10^{-5}$ S cm⁻¹).

3.1 The configurations and sensing principles of different sensors.

For an over view in classification of gas sensors and conFiguration of different sensors, Epic's report

(Adam *et al.* 1991) and Nylander's review (Nylander, 1985) are two important literatures. Here, we will discuss only the widely used sensors based on conducting polymers.

3.1.1 Chemiresistor

Chemiresistor consists of one or several pairs of electrodes and a layer of conducting polymer in contacting with the electrodes, as illustrated in Fig. 9. Chemiresistor are the most common type of sensors (Liu *et al.* 2004; Caravan *et al.* 2000; Ogura *et al.* 1997; Lavrik *et al.* 1996; Bearzotti *et al.* 1996; Penza *et al.* 1997; Dobay *et al.* 1999; Jin *et al.* 2003; Santhanam *et al.* 2005). They can be fabricated through a cheap and convenient process (Janata and Josowicz, 2003).

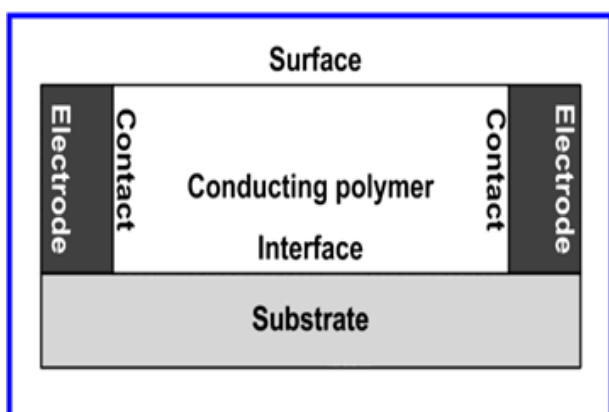


Fig. 9: Configuration of chemiresistor

The electrical resistance change of the sensing material is measured as the output, so a simple ohm meter is enough to collect the data. Usually, a constant current or potential is applied on the sensor, and the measuring signal is potential or current change, respectively. Alternating current (AC) also has been used as the signals of chemiresistor sensors. Chemiresistors are the most popular device configuration of gas sensors and many commercialized devices are based on it. The disadvantage of chemiresistor is that the resistance of a device is influenced by many ambient factors and not only determined by the resistance of the conducting polymer sensing film, but also the contact resistance of the electrodes.

3.1.2 Transistor and Diode Sensors

The well known Organic Thin-Film Transistors (OTFTs) have been applied in sensing field just after it was first developed (Mabeck and Malliaras, 2006). A TFT consists of a semiconductor active layer in contact with two electrodes ("source" and "drain") and a third electrode ("gate") which is separated with the active layer by an insulating film. The current flows through the other semiconducting layer, e.g. silicon. The disadvantages of these devices are, as other semiconductor devices, their preparation is slightly

complicate and the characterization of a transistor is more difficult than a chemiresistor.

3.1.3 Optic Devices

UV-Vis and NIR spectra can reflect the electron configurations of conducting polymers. During the doping process, the spectral absorbance of conducting polymer film will change and new bands will appear due to the formation of polarons and bipolarons; while the spectrum can return to its original shape after dedoping (Brédas *et al.* 1984). Thus, analyte gas contacting conducting polymer film can be detected by recording the UV-vis or NIR spectral changes. An ultra thin film is suitable for fabricating an optic sensor, because the spectrum of a thin film is easy to be recorded by using commercial spectrometers. In fact, the simplest sensor is just a glass covered with an ultra thin conducting polymer film. In order to online measure the spectral change with commercial UV-vis or NIR spectrometer, a special vessel is necessary. The responses of the sensors are usually the transmittance or absorbance changes of the sensing films.

3.2 Piezoelectric Crystal Sensor

Two types of sensors fall into this category; they are Quartz Crystal Microbalance (QCMB) and surface acoustic wave sensors. The principle and applications of piezoelectric crystal sensors are well reviewed by Chang *et al.* (2000).

3.2.1 Quartz Crystal Microbalance Sensor Device

A typical schematic diagram of QCMB is shown in Fig. 10. It consists of a conducting polymer coated quartz crystal and a pair of electrodes. The resonant frequency of a quartz crystal changes with its mass load, which was described as following (Sauerbrey, 1959).

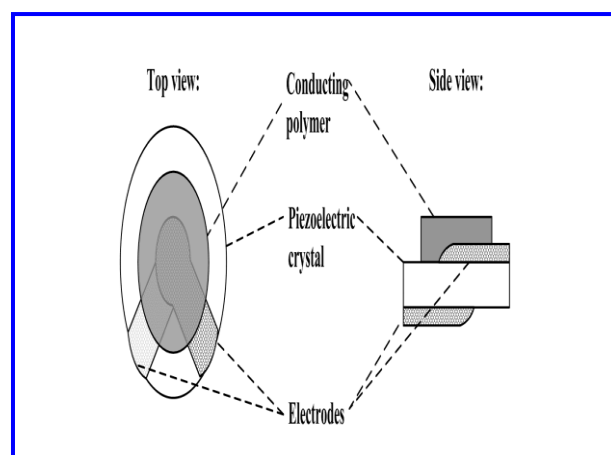


Fig. 10: Configuration of quartz crystal microbalance sensor device

Table 2. Comparison of gas sensor technologies

Gas sensor type	Gas detected	Material Used	Temp. °C	Sensitivity	Reference
Catalytic Sensor					
Pellistor type Catalytic Sensor	CH ₃	Pt/pd	300- 500	-	Lei Xu <i>et al.</i> (2010)
Thermo-Electric Gas Sensor	H	Cu- Bi	80- 160	-	Mc Aleer (1985)
	C ₂ H ₅ OH, C ₆ H ₁₄	Cr	-	-	Anuradha <i>et al.</i> (2006)
Thermal Conductivity gas Sensor	CO in H & CH ₃	SiC microplate	-	-	Pascal Tardy <i>et al.</i> (2004)
Electrochemical Gas sensor	CO	-	-	-	Kohlraush (1885) & Haber (1900)
Amperometric Gas Sensor	Hydro-carbon	-	-	-	-
	NO ₂	Pt/Nafion	-	0 to 485 ppm	Kuo chuan Ho & Wen Tung hung (2001)
Potentiometric Gas sensor	O	Pd, Pt, Au, Ag	600- 000	-	-
Optical Gas Sensor	H	Pd, Chromic oxide	-	-	Butler (1984)
Infra Red Gas Sensor	CO ₂ , CO, hydrocarbons	-	-	-	-
Semiconductor Sensor	H, O, CO, R-OH	Sn, Si	200 - 250	-	Seiyama and Taguchi (1962)
Acoustic Wave Gas Sensor	-	-	-	-	King <i>et al.</i> (1964)
Surface Acoustic Wave Gas Sensor	NH ₃ , CO, CO ₂	Al, Au, Pt	Frequency 40-60 0MHz	-	-

Table 3. Detect limits of sensors based on conducting polymers and their composites to several gas analytes

S. No	Analyte	Sensing material	Detect limit	Sensor type
1	NH ₃	PAni/SWNT	50 ppb	Chemiresistor
2	NO ₂	PPy/PET	<20 ppm	Chemiresistor
		PTh/CuPc	4.3 ppm	Chemiresistor
		PAni/In ₂ O ₃	<0.5 ppm	SAW
3	HCl	PAni/FeAl	0.2 ppm	Chemiresistor
4	H ₂ S	PAni/heavy metal salts	<10 ppm	Chemiresistor
5	CO	PAni/FeAl	10 ppm	Chemiresistor
		PAni/In ₂ O ₃	<60 ppm	SAW
6	Water	PAni	< 25 ppm	Chemiresistor
7	Methanol	PAni/Pd	<1 ppm	Chemiresistor
8	Methane	halide Poly(3-methylthiophene)/MWNT	Several ppm	Chemiresistor
		PAni/Cu	<10 ppm	Chemiresistor
9	Acetone	PTh copolymer	200~ 300 ppm	Chemiresistor
10	Toluene	PTh copolymer	20 ppm	Chemiresistor
11	Butyl amine	Poly(anilineboronic acid)	10 ppb	Chemiresistor

4. CARBON NANOTUBE BASED GAS SENSOR

Besides selectivity being an issue SnO₂ and other metal oxide based sensors operate only at elevated temperatures typically over 200 °C was proposed by Mishra and Agarwal (1998). Adding CNTs to an otherwise non responsive polyaniline allows CO sensing in the range of 100-1000 ppm at room temperature was done by Wanna *et al.* (2006). Vertically aligned CNTs decorated with Pt, Ru and Ag cluster responded to 0.1% CO at 150 °C when exposed to a mixture of CO, CO₂, NH₂, CH₄ and NO₂ with the mixture representing a landfill gas was proposed by Penza *et al.* (2010). The nano wire form of the metal oxides has been considered in gas sensor construction in reason has by Meyyappan and Sunkara (2010). Recently Pd/SnO₂ sensors have been shown to have good sensitivity in the range of 6-18 ppm of CO at a temperature of 60 °C have been proposed by Kim *et al.* (2013). MWNTs with the aid of nitrogen doping also show a good response to CO in the range of 2-20 ppm at ambient and 150 °C conditions has been proposed by Adjizian *et al.* (2014). Catalytic combustion based sensors rely on oxidation of CO and measuring the change in resistance of a metal electrode. Recently novel catalysts that can oxidize at 70 °C have been proposed by Hosaya *et al.* (2014).

5. POLYMER CNT COMPOSITE

The formation of macroscopic carbon cylinders (diameter 0.5 cm and length 5 cm) Consisting of ordered and aligned CNTs (diameter 200-300 nm and length 100 nm) through CVD technique by spraying benzene and ferrocene as a precursor (Srivastava *et al.* 2004). This carbon cylinder was used in the filtration of heavier hydrocarbon species from petroleum and also in the removal of bacteria from the drinking water. The coaxial carbon cylinder has been characterized through scanning electron microscopy (SEM) technique.

Currently three methods are widely used to incorporate CNTs into polymers.

1. Solution mixing or film casting of suspensions of CNT s in dissolved polymer (Kymakis *et al.* 2002).
2. In situ polymerization of CNT – polymer monomer mixture (Jia *et al.* 1999).
3. Melt mechanical mixing of CNTs with polymers (Jin *et al.* 2002).

The benzene- ferrocene precursor flow with the carrier gas Ar, Fe particles get deposited on the inner walls of the quartz tube through dissociation of ferrocene further supply of precursor allows the dissociation of hydrocarbon on these precipitate Fe Particles. The precursor and Ar gas pass through the first CNTs stack and reach the base i.e. the quartz tube from where the CNT stack growth takes place. The coaxial carbon cylinders consisting of aligned CNT stacks have been prepared by controlled spray pyrolysis technique employing benzene- ferrocene (~30 mg/ml) precursor

and Ar as carrier gas. The coaxial carbon cylinders consisting of aligned CNTs have been prepared without using any patterned substrates. The CNT stacks have been produced by periodically interrupting the flow of precursor. The MWNTs polymer composite films have been prepared by solution cast technique and then these have been characterized by employing the SEM technique. The conductivity measurements on the MWNTs-PEO composite films with highest concentration of MWNTs showed an increase of eight orders of magnitude in conductivity from bare PEO film. The temperature dependence of the conductivity for MWNTs-PEO composite showed predominantly semiconducting behavior.

The coaxial carbon cylinders were prepared by spray pyrolysis of benzene- ferrocene solution in Ar atmosphere at 900 °C temperature (Mishra *et al.* 2007). The CNTs polymer (E.g. polyethylene oxide, polyacrylamide) composites were prepared by solution cast technique (Awasthi *et al.* 2006). The CNTs were synthesized by the vapour phase pyrolysis of ferrocene along with ethylene (Awasthi *et al.* 2003). The ratio of CNTs in this work corresponds to 5, 10, 15, 20, 30, 40 and 50 for which films were prepared. The growth of carbon cylinder consisting of only one layer of radically aligned MWNTs has earlier been studied (Srivastava *et al.* 2004).

6. CONCLUSION

This review paper presents the study of different types of advanced model sensors for various gas detections and so different sensing techniques were discussed includes catalytic, electrochemical, optical, thermal and acoustic. In which SAW sensors have been relatively modest commercial success to date and the characteristics of the sensors such as sensitivity, selectivity, high response time and Fast recovery time should be analyzed.

FUNDING

This research received no specific grant from any funding agency in the public, commercial, or not-for-profit sectors.

CONFLICTS OF INTEREST

The authors declare that there is no conflict of interest.

COPYRIGHT

This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC-BY) license (<http://creativecommons.org/licenses/by/4.0/>).



REFERENCES

- Acquaroli, L. N., Urteaga, R. and Koropecski, R. R., Innovative design for optical porous silicon gas sensor, *Sens. Actuat. B: Chem.*, 149(1), 189-193(2010).
doi:10.1016/j.snb.2010.05.065
- Adam, H., Stanislaw, G. and Folke, I., Chemical sensors definitions and classification, *Pure Appl. Chem.*, 63, 1274-1250(1991).
doi:10.1351/pac199163091247.
- Adjizian, J. J., Leghrib, R., Koos, A. A., Suarez-Martinez, I., Crossley, A., Wagner, P., Grobert, N., Liobet, E. and Ewels, C. P., Boron and Nitrogen-doped MWCNTs for gas detection, *Carbon*, 66, 662-7673(2014).
doi:10.1016/j.carbon.2013.09.064
- Anuradha, S. and Rajanna, K., Development of Thermoelectric gas sensors for volatile organic Compounds, in Proceedings of the 5th IEEE Conference on Sensors, Daegu, 22-25, 716-718(2006).
- Awasthi, K., Awasthi, S., Srivastava, A., Kamalakaran, R., Talapatra, S., Ajayan, P. M. and Srivastava, O. N., Synthesis and characterization of carbon nanotube polyethylene oxide composites, *Nanotechnol.*, 17(21), 5417-5422 (2006).
doi:10.1088/0957-4484/17/21/022
- Awasthi, K., Singh, A. K. and Srivastava, O. N., Formation of Carbon Nanotubes without Iron Inclusion and Their Alignment through Ferrocene and Ferrocene-Ethylene Pyrolysis, *J. Nanosci. Nanotechnol.*, 3(6), 540-544(2003).
doi:10.1166/jnn.2003.237
- Bearzotti, A., Foliated, V., Polzonetti, G., Fuci, G., Furlani, A. and Russo, M.V., Investigations on the response to humidity of an interdigitated electrode structure coated with iodine doped polyphenylacetylene, *Mater. Sci. Eng. B*, 40(1), 1-4(1996).
doi:10.1016/0921-5107(96)01589-9
- Brédas, J. L., Scott, J. C., Yakushi, K. and Street, G. B., Polarons and bipolarons in polypyrrole: Evolution of the band structure and optical spectrum upon doping, *Phys. Rev.*, 30(B), 1023(1984).
doi:10.1103/PhysRevB.30.1023
- Caravan, E., Vies, C., Dolby, R., Harsanyi, G. and Berkesi, O., Irregular response of the polypyrrole films to H₂S, *Electro analysis*, 12, 1195-1200(2000).
doi:10.1002/1521-109(200010)12:15<1195::AID-ELAN1195>3.0.CO;2-1
- Chang, S. M., Muramatsu, H., Nakamura, C. and Miyake, J., The principle and applications of piezoelectric crystal sensors, *Mater. Sci. Eng. C-Biomimetic Supramol. Syst.*, 12, 111-123(2000).
doi:10.1016/S0928-4931(00)00167-3
- Chao, Y., Yao, S., Buttner, W. J. and Stetter, J. R., Amperometric sensor for selective and stable Hydrogen measurement, *Sensors and Actuators B: Chemical*, 106(2), 784-790(2005).
doi:10.1016/j.snb.2004.09.042
- Chen, D., Liu, W., Zhang, Y., Liu, J., Kan, R., Wang, M., Chen, J. and Cui, Y., H₂S detection by tunable diode laser absorption spectroscopy, in Proceedings of the IEEE International Conference on Information Acquisition, Shandong, 20-23, 754-758(2006).
- Currie, J. F., Essalik, A. and Marusic, J. C., Micromachined thin film solid state electrochemical CO₂, NO₂ and SO₂ gas sensors, *Sens. Actuat. B: Chem.*, 59(2), 235-241(1999).
doi:10.1016/S0925-4005(99)00227-0
- De Graaf, G. and Wolffenbuttel, R., Surface-micromachined Thermal conductivity detectors for Gas sensing, in Proceedings of the IEEE International Instrumentation and Measurement Technology Conference (I2MTC), Graz, 13-16, 1861-1864(2012).
- Dobay, R., Harsanyi, G. and Visy, C., Conducting polymer based electrochemical sensors on thick film substrate, *Electro anal.*, 11, 804-808(1999).
doi:10.1002/(SICI)1521-109(199907)11:10/11<804::AID-ELAN804>3.0.CO;2-B
- Dubbe, A., Fundamentals of solid state ionic micro gas sensors, *Sens. Actuat. B*, 88, 138-148(2003).
doi:10.1016/S0925-4005(02)00317-9
- Dutta, A., Nishiguchi, H., Takita, Y. and Ishihara, T., Amperometric hydrocarbon sensor using La(Sr) Ga(Fe) O₃ solid electrolyte for monitoring in Exhaust gas, *Sens. Actuat. B: Chem.*, 108(1-2), 368-373(2005).
doi:10.1016/j.snb.2004.10.042
- Eui Bok, Lee, Hwang, I. S., Cha, J. H., Lee, H. J., Lee, W. B., Pak, J. J., Lee, J. H. and Ju, B. K., Micromachined catalytic combustible hydrogen gas Sensor, *Sens. Actuat. B: Chem.*, 153(2), 392-397(2011).
doi:10.1016/j.snb.2010.11.004
- Firth, J. G., Jones, A. and Jones, T., The principles of the detection of flammable atmospheres by catalytic devices, *Combust. Flame*, 20, 303-311(1973).
doi:10.1016/0010-2180(73)90021-7
- Gan, T. and Hu, S., Electrochemical sensors based on Graphene materials, *Microchim. Acta*, 175(1-2), 1-19(2011).
doi:10.1007/s00604-011-0639-7
- Garcia Romeo, D., Martinez, A. and Azcona, C., NDIR-based CO₂ Monitor System for Wireless Sensor Networks, IEEE Latin American Symposium on Circuits and Systems LASCAS, Playa Del Carmen, 29, 1-4(2012).
doi:10.1109/LASCAS.2012.6180326
- Ho, K. and Hung, W., An Amperometric NO₂ gas Sensor based on Pt/Ni on 1 Electrode, *Sensor. Actuat. B: Chem.* 79(2), 11-16(2001).
doi:10.1016/S0925-4005(01)00782-1

- Hordvik, A., Berg, A. and Thingbo, D., A fibre optic gas detection system, *Proc. 9th Int. Conf. on opt. Comms. Ecoc.*, 83, 317(1983).
- Hosaya, A., Tamura, S. and Imanaka, N., A catalytic combustion type CO gas sensor incorporating aluminium nitride as an intermediate heat transfer layer for accelerated response time, *J. Sensors Sensor syst.*, 3, 141-144(2014).
doi:10.5194/jsss-3-141-2014
- Huang, J. and Wan, Q., Gas sensors based on semiconducting metal oxide one-dimensional nanostructures, *Sens.*, 9(12), 9903-9924(2009).
doi:10.3390/s91209903
- Hubert, T., Boon-Brett, L., Black, G. and Banach, U., Hydrogen sensors – A review, *Sensor. Actuat. B: Chem.*, 157(2), 329-352(2011).
doi:10.1016/j.snb.2011.04.070
- Inaba, H., Kobayashi, T., Hirama, M. and Hamza, M., Optical-fiber network system for Air-pollution monitoring over a wide area by optical absorption method, *Electron. Lett.*, 15(23), 749-751(1979).
doi:10.1049/el:19790536
- Janata, J. and Josowicz, M., Conducting polymers in electronic chemical sensors, *Nat. Mater.*, 2, 19-24(2003).
doi:10.1038/nmat768
- Jia, Z., Wang, Z., Xu, C., Liang, J., Wei, B., Wu, D. and Zhu, S., Study on poly(methylmethacrylate): Carbon nanotube composites, *Mater. Sci. Eng. A*, 271, 395-400(1999).
doi:10.1016/S0921-5093(99)00263-4
- Jin, G., Too, C. O., Norrish, J. and Wallace, G. G., Directed electrochemical deposition of conducting polymer filament on screen-printed array, *Synth. Met.* 135, 29-30(2003).
doi:10.1016/S0379-6779(02)00686-0
- Jin, J. X., peramoda, K. P., Goh, S. H. and Xu, G. Q., Poly(vinylidene fluoride)-assisted melt-blending of multi-walled carbon nanotube/poly(methyl methacrylate) composites, *Mater. Res. Bull.*, 37, 271-278(2002).
doi:10.1016/S0025-5408(01)00775-9
- Jones, E., The Pellistor catalytic gas detection, in: P. Moseley, B. Tofield (Eds.), *Solid State Gas Sensors, Adam Hilger, Bristol*, Chapter 2, 17-31(1987).
- Kasai, N., Tsuchiya, C., Fukuda, T., Sekine, K., Sano, T. and Takehana, T., Propane gas leak detection by infrared absorption using carbon infrared emitter and infrared camera, *NDT & E International*, 44(1), 57-60(2011).
doi:10.1016/j.ndteint.2010.09.006
- Khodadadi, A., Mohajerzadeh, S. S., Mortazavi, Y. and Miri, A. M., Cerium oxide / SnO₂-based Semiconductor gas sensors with improved sensitivity to CO, *Sensor. Actuat. B: Chem.*, 80(3), 267-271(2001).
doi:10.1016/S0925-4005(01)00915-7
- Kim, B., Lu, Y., Hannon, A., Meyyapan, M. and Li, J., Low temperature Pd/SnO₂ sensor for CO detection, *Sens. Actuat. B*, 177, 770-775(2013).
doi:10.1016/j.snb.2012.11.020
- King, W. H., Piezoelectric sorption detector, *Anal. Chem.*, 36, 1735-1739(1964).
doi:10.1021/ac60215a012
- Kobayashi, T., Hirana, M. and Inaba, H., Remote monitoring of NO₂ molecules by Differential absorption using optical fibre link, *Appl. Opt.*, 20(5), 3279(1981).
doi:10.1364/AO.20.003279
- Kymakis, E., Alexandou, I. and Amaratunga, G. A. J., Single-walled carbon nanotube-polymer composites: electrical, optical and structural investigation, *synth. Metal*, 127, 59-62(2002).
doi:10.1016/S0379-6779(01)00592-6
- La, D. D., Kim, C. K., Jun, T. S., Jung, Y., Seong, G. H., Choo, J. and Kim, Y. S., Pt nanoparticle-supported Multiwall carbon nanotube electrodes for Amperometric hydrogen detection, *Sensor. Actuat. B: Chem.*, 155(1), 191-198(2011).
doi:10.1016/j.snb.2010.11.045
- Lavrik, N. V., DeRossi, D., Kazantseva, Z. I., Nabok, A. V., Nesterenko, B. A., Piletsky, S. A., Kalchenko, V. I., Shivaniuk, A. N. and Markovskiy, L.N., Composite polyaniline/calixarene Langmuir-Blodgett films for gas sensing, *Nanotechnol.*, 7, 315-319(1996).
doi:10.1088/0957-4484/7/4/002
- Lee, C., Akbar, S. A. and Park, C. O., Potentiometric CO₂ gas sensor with lithium phosphorous oxynitride Electrolyte, *Sens. Actuat. B: Chem.*, 80(3), 234-242(2001).
doi:10.1016/S0925-4005(01)00902-9
- Li, T. and Lie, Xu., A high heating efficiency two-beam microplate for catalytic gas sensors, in Proceedings of the IEEE International Conference on Micro Electronic and Mechanical Systems MEMS, Kyoto, Japan, 65-68(2012).
- Lim, C., Wang, W., Yang, S. and Lee, K., Development of SAW-based multi-gas sensor for simultaneous detection of CO₂ and NO₂, *Sens. Actuat B: Chem.*, 154(1), 9-16(2011).
doi:10.1016/j.snb.2010.02.057
- Liu, H. Q., Kameoka, J., Czaplewski, D. A. and Craighead, H. G., Polymeric nanowire chemical sensor, *Nano Lett.*, 4, 671-675(2004).
doi:10.1021/nl049826f
- Lu, X., Wu, S., Wang, L. and Su, Z., Solid-state Amperometric hydrogen sensor based on polymer Electrolyte membrane fuel cell, *Sens. Actuat. B: Chem.*, 107(2), 812-817(2005).
doi:10.1016/j.snb.2004.12.022
- Mabeck, J. T. and Malliaras, G. G., Chemical and biological sensors based on organic thin-film transistors, *Anal. Bioanal. Chem.*, 384, 343-353(2006).
doi:10.1007/s00216-005-3390-2

- Manap, H., Muda, R., O'Keeffe, S. and Lewis, E., Ammonia sensing and a cross sensitivity evaluation With atmosphere gases using optical fiber sensor, *Procedia Chemistry*, 1(1), 959-962(2009).
doi:10.1016/j.proche.2009.07.239
- Massie, C., Stewart, G., McGregor, G. and Gilchrist, J. R., Design of a portable optical sensor for Methane gas detection, *Sens. Actuat. B: Chem.*, 113(2), 830-836(2006).
doi:10.1016/j.snb.2005.03.105
- Meyyappan, M. and Sunkara, M. K., Inorganic nanowires: Applications, properties and characterization, *CRS press, Boca Raton, FL*. See chapter 14, (2010)
- Milella, E. and Penza, M., SAW gas detection using Langmuir-Blodgett polypyrrole films, *Thin Solid Films*, 329, 694-697(1998).
doi:10.1016/S0040-6090(98)00743-3
- Mishra, P. R., Awasthi, K. and Srivastava, O. N., Formation and microstructural characterization of coaxial carbon cylinders consisting of aligned carbon nanotube stacks, *Nanosci. Nanotechnol.*, 7(6), 1815-1819(2007).
doi:10.1166/jnn.2007.722
- Mishra, V. N. and Agarwal, R. P., Sensitivity, response and recovery time of SnO₂ based thin-film sensor array for H₂, CO₂, CH₄ and LPG, *Sens. Actuat. B.*, 29, 861-874(1998).
doi:10.1016/S0026-2692(98)00019-6
- Nylabder, C., Armrests, M. and Lundstrom, I., An ammonia detector based on a conducting polymer, In Proceedings of the International Meeting on Chemical Sensors, *Fukuoka, Japan*, 203-207(1983).
- Nylabder, C., Chemical and biological sensors, *J. Phys. E: Sci. Instrum.*, 18, 736-750(1985).
doi:10.1088/0022-3735/18/9/003
- Ogura, K., Saline, T., Nakayama, M. and Shiigi, H., The humidity dependence of the electrical conductivity of a soluble polyaniline-poly (vinyl alcohol) composite film, *J. Mater. Chem.*, 7, 2363-2366(1997).
doi:10.1039/a705463g
- Okajima, H., Kakuma, S., Uchida, K., Wakimoto, Y. and Noda, K., Measurement of methane gas concentration Using infrared LED, in Proceedings of the International Joint Conference SICE-ICASE, Busan, 18-21, 1656-1659(2006).
- Okazaki, S., Nakagawa, H., Asakura, S., Tomiuchi, Y., Tsuji, N., Murayama, H. and Washiya, M., Sensing Characteristics of an optical fiber sensor for hydrogen leak, *Sens. Actuat. B: Chem.*, 93(1-3), 142-147(2003).
doi:10.1016/S0925-4005(03)00211-9
- Penza, M., Milella, E. and Anisimkin, V. I., Gas sensing properties of Langmuir-Blodgett polypyrrole Film investigated by surface acoustic waves, *IEEE Trans. Ultrason. Ferroelectr. Freq. Control*, 45, 1125-1132(1998).
doi:10.1109/58.726434
- Penza, M., Milella, E., Alba, M. B., Quirini, A. and Vasaneli, L., Selective NH₃ gas sensor based on Langmuir-Blodgett polypyrrole film, *Sens. Actuat. B*, 40, 205-209(1997).
doi:10.1016/S0925-4005(97)80263-8
- Penza, M., Rossi, R., Alusi, M. and Serra, E., Metal-modified and vertically aligned CNT sensors Array for land-film gas monitoring application, *Nanotechnol.*, 21, 105501(2010).
doi:10.1088/0957-4484/21/10/105501
- Phawachalotorn, C., Sanguanruang, O. and Ishihara, T., Highly selective Amperometric sensors For carbon monoxide detection in exhaust gas, *Sens. Actuat. B: Chem.*, 161(1), 635-640(2012).
doi:10.1016/j.snb.2011.10.081
- Radhakrishnan, R., Virkar, A. V., Singhal, S. C., Dunham, G. C. and Marina, O. A., Design, fabrication and Characterization of a miniaturized series-connected Potentiometric oxygen sensor, *Sens. Actuat. B: Chem.*, 105(2), 312-321(2005).
doi:10.1016/j.snb.2004.06.014
- Santhanam, K. S. V., Sangoi, R. and Fuller, L., A chemical sensor for chloromethanes using a nanocomposite of MWCNT with poly (3-methylthiophene), *Sens. Actuat. B*, 106, 766-771(2005).
doi:10.1016/j.snb.2004.09.034
- Sathiyamoorthi, R., Chandrasekaran, R., Mathanmohan, T., Muralidharan, B. and Vasudevan, T., Study of electrochemical based gas Sensors for fluorine and chlorine, *Sens. Actuat. B: Chem.*, 99(2), 336-339(2004).
doi:10.1016/j.snb.2003.11.031
- Sauerbrey, G., Verwendung von Schwingquarzen zur Wägung dünner Schichten und zur Mikrowägung, *Z. Phys.*, 155, 206-222(1959).
doi:10.1007/BF01337937
- Shin, W., Matsumiya, M., Izu, N. and Murayama, N., Hydrogen-selective thermoelectric gas sensor, *Sens. Actuat. B: Chem.*, 93(1-3), 304-308(2003).
doi:10.1016/S0925-4005(03)00225-9
- Shin, W., Matsumiya, M., Qiu, F., Izu, N. and Murayama, N., Thermoelectric gas sensor for detection of high hydrogen concentration, *Sens. Actuat. B: Chem.*, 97(2-3), 344-347(2004).
doi:10.1016/j.snb.2003.08.029
- Simon, I. and Arndt, M., Thermal and gas-sensing Properties of a micromachined thermal conductivity Sensor for the detection of hydrogen in automotive Applications, *Sens. Actuat. A: Phys.*, 97-98, 104-108(2002).
doi:10.1016/S0924-4247(01)00825-1
- Srivastava, A., srivastava, O. N., Talapatra, S., Vjtai and Rand Ajayan, P. M., Carbon Nanofibre, *Nature Mater.*, 3, 610-614(2004).
doi:10.1038/nmat1192

- Stueflotten, S., Christensen, T., Iversen, S., Hellvik, J. O., Almas, K. and Wien, T., An infrared fibre optic gas detection system, Proc. Ofs-94 int. conf., 87(1986).
- Tardy, P., Coulon, J. R., Lucat, C. and Menil, F., Dynamic thermal conductivity sensor for gas Detection, *Sens. Actuat. B: Chem.*, 98(1), 63-68(2004).
[doi:10.1016/j.snb.2003.09.019](https://doi.org/10.1016/j.snb.2003.09.019)
- Timers, B., Olthuis, W. and van den Berg, A., Ammonia sensors and their applications - A review, *Sens. Actuat. B*, 107, 666-677(2005).
[doi:10.1016/j.snb.2004.11.054](https://doi.org/10.1016/j.snb.2004.11.054)
- Wanna, Y., Srisukhumbowornchai, N., tauntranont, A., Wisitsoraat, N., Thavararungkul, P. and Singjai, P., The effect of CNT dispersion on CO gas sensing characteristics of polyaniline gas sensor, *J. Nanosci. Nanotechnol.*, 6, 3893- 3896(2006).
[doi:10.1166/jnn.2006.675](https://doi.org/10.1166/jnn.2006.675)
- Xu, L., Li, T., Gao, X. and Wang, Y., Behavior of a Catalytic Combustion Methane Gas Sensor Working On Pulse Mode, in Proceedings of the IEEE International Conference on Sensors, Kona, HI, USA, 1-4, 391-394(2010).
- Yan, Y., Miura, N. and Yamazoe, N., Potentiometric Sensor using stabilized zirconia for chlorine gas, *Sens. Actuat. B: Chem.*, 24(1), 287-290(1995).
[doi:10.1016/0925-4005\(95\)85062-7](https://doi.org/10.1016/0925-4005(95)85062-7)
- Yang, J. C. and Dutta, P. K., High temperature Potentiometric NO₂ sensor with asymmetric sensing And reference Pt electrodes, *Sens. Actuat. B: Chem.*, 143(2), 459-463(2010).
[doi:10.1016/j.snb.2009.09.023](https://doi.org/10.1016/j.snb.2009.09.023)
- Yoon, S., Lee, C. and Kim, Y., A thermoelectric gas Sensor based on an embedded tin oxide catalyst for Detecting hydrogen and NO_x Gases, in Proceedings of The IEEE 22nd International Conference on Micro Electro Mechanical Systems (MEMS '09), Sorrento, 272-275(2009).
- Zakrzewska, K., Mixed oxides as gas sensors, *Thin Solid Films*, 391, 229-238(2001).
[doi:10.1016/S0040-6090\(01\)00987-7](https://doi.org/10.1016/S0040-6090(01)00987-7)
- Zhang, G., Li, Y. and Li, Q., A miniaturized carbon Dioxide gas sensor based on infrared absorption, *Opt. Lasers Eng.*, 48(12), 1206-1212(2010).
[doi:10.1016/j.optlaseng.2010.06.012](https://doi.org/10.1016/j.optlaseng.2010.06.012)