



Detection of River Boundary Edges from Remotely Sensed Image

Arshad Husain^{1*}, Shailendra Chaudhary²

¹GIS Cell, Motilal Nehru National Institute of Technology Allahabad, UP, India

²Department of Civil Engineering, Motilal Nehru National Institute of Technology Allahabad, UP, India

Received: 15.05.2017 Accepted: 27.09.2017 Published: 30-12-2017

*rgi1501@mnnit.ac.in

ABSTRACT

Detection of river boundary from remotely sensed imagery plays a vital role in space-based river studies. Procuring river attributes such as length, width, branching pattern, boundaries, and temporal variation are very useful in several applications such as surface water supply, transport, distribution, and dynamics. Typically, field surveying is a commonly used method to study these river characteristics. It is a commonly time-consuming, labor-intensive, and expensive method to gather river attributes in the field. In particular, it is unsafe and not feasible to measure rivers in certain environments such as ice sheets, tidal flats, and floodplains. Therefore, satellite imageries of the earth's surface are playing critical roles in river studies. The detection of linear and curvilinear components is a classic subject in image processing studies. In the present study, a method for the detection of river boundaries is described. Image of Linear Imaging and Self Scanning Sensor (LISS-III) of Resources at-2 satellite is used. The method includes three basic steps, i.e., mosaicking of different tiles of images, edge detection, and connected component analysis.

Keywords: Boundary; Edge detection; Remote Sensing; River Satellite Image.

1. INTRODUCTION

The measurement of river attributes including length, width, boundary, spatial and temporal deviations are typically performed by means of fieldwork. It is a tedious, labor-intensive, and cost-oriented task to directly measure these attributes in the field. The evaluation of these attributes can give valuable bits of information into various applications such as surface water supply, transport, dispersion, etc. It is also dangerous and difficult to quantify river attributes in specific conditions such as ice sheets, salt marshes, and floodplains (Yang *et al.* 2013). In such circumstances, satellite imageries of the earth are facilitating the solution to overcome these hurdles in river attribute measurement. Nowadays, optical remotely sensed imageries play a significant role in river studies (river's attribute calculation). Detection and generation of rivers and their mask from remotely sensed imagery is a critical task. From the generated mask of the river, the width can be directly measured (Pavelsky *et al.* 2008), and subsequently, certain additional key information, i.e., river depth, flow velocity, and discharge, can be further determined. Rivers are open water bodies; they appear as dark, continuous, and curvilinear features in the satellite imagery due to very low visible/near-infrared spectral reflectance. The formation of river networks is primarily organized by surface topography, due to this determination of river features has received huge attention. Subsequently, Digital Terrain Models (DTMs)

have become the primary data source to determine drainage networks using a different methods such as contributing area methods, area-slope methods, and grid network ordering methods (Liu *et al.* 2014). Only a few research articles have mentioned the limitation of DTMs-derived drainage networks and tried to detect rivers from optical and Synthetic Aperture Radar (SAR) images (Benstead and Leigh, 2012). Three primary detection approaches, namely manual interpretation (Trigg *et al.* 2012), semi-automatic (Dillabaugh *et al.* 2002), and ancillary-data-support (Pai and Saraswat, 2013; Lau and Franklin, 2013) are used in these studies. A novel automated method is proposed to detect rivers using high-resolution SAR images (Klemenjak *et al.* 2012). The proposed method includes adaptively created training sampling and supervised image classification. Concept of Support Vector Machine (SVM) classifier and supervised image classification are used to delineate rivers (Güneralp *et al.* 2013). The proposed automatic method shows good completeness for delineating wide rivers while less attention is applied to identify the thin present rivers in images. These thin rivers present in images have very lower spectral contrast as compared to the background of the image. A multi-scale classification approach to detect the thin river rivers is proposed (Jiang *et al.* 2014). The proposed method noticed the limitations of studying rivers at a mono-scale. However, the spectral contrast along thin river sequences is typically unbalanced due to differences in river depth, sediment loads, etc. In order to detect the rivers and their attributes,

it is necessary to know the characteristics of rivers in remotely sensed imagery. The key and probable characteristics of rivers in optical visible/near-infrared remotely sensed imagery are, rivers appear as curvilinear features instead of blob-like features, rivers exhibit Gaussian-shaped cross-sections, and rivers are continuous and not a series of disconnected curvilinear segments.

In this study, a semi-automated approach to detect the boundary edges of rivers in remotely sensed imagery is proposed. They used satellite imagery as geo-referenced therefore, detected boundary edges can be further utilized to calculate the length and width of the river.



Fig. 1: Google Earth image of test site.



Fig. 2: Perspective view of first tile (G44P15) image.

2. TEST DATA

The study area of the present study is the Triveni Sanagm region of Allahabad city, Uttar Pradesh, India (25°20'19.7"N, 81°58'43.8"E). The satellite imagery used in the present study is taken from the Bhuvan official website (<http://bhuvan.nrsc.gov.in/data/download/index.php>). The data is obtained from Linear Imaging and Self Scanning Sensor (LISS-III) of Resources at -2, which operates in three spectral bands in Visible and Near-Infrared (VNIR) and one band in Short wave Infrared (SWIR) with 24-meter spatial resolution and a swath of

141 km. Two tiles (Fig. 2 and Fig. 3) are used in order to cover the whole study area. The specification of tiles is shown in Table 1.

3. METHOD

Three basic steps are incorporated to detect the boundary edges of the river; initially, the mosaicking of tiles is performed, after that canny edge detection technique is performed at the mosaicked image. In the last step, an area-based connected component analysis is performed. Fig.4 shows the detailed process outline of the method. All the step of the method is described in detail in the following section.

Table 1. Specification about dataset.

Spec.	Tile 1		Tile 2	
Name	G44P15		G44Q03	
Coverage	Upper left	X = 81.75E, Y = 25.5N	Upper left	X = 82E, Y = 25.5N
	Upper right	X = 82E, Y = 25.5N	Upper right	X = 82.25E, Y = 25.5N
	Lower right	X = 82E, Y = 25.25N	Lower right	X = 82.25E, Y = 25.25N
	Lower left	X = 81.75E, Y = 25.25N	Lower left	X = 82E, Y = 25.25N
Date Of Pass	24-oct-08		24-oct-08	
File Format	Geotiff		Geotiff	
Spatial Resolution	0.000225 Degree/24 meter		0.000225 Degree/24 meter	



Fig. 3: Perspective view of second tile (G44Q03) image.

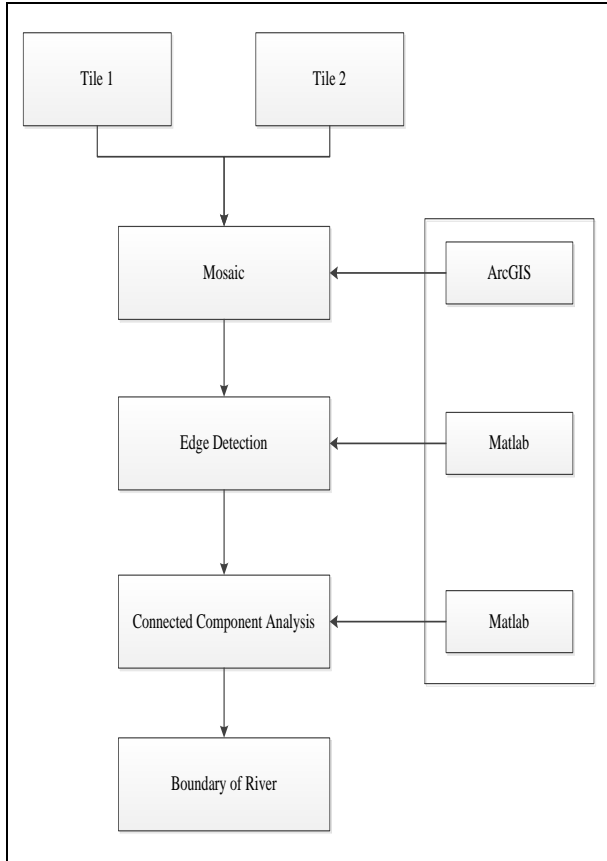


Fig. 4: Flowchart outline of the proposed method.

3.1 Mosaicking of Tiles

Mosaicking of the raster dataset is used in such cases in which two or more adjacent raster datasets need to be merged into one entity. In the present study, both tiles are mosaicked with each other using ArcGIS 10.3.

In order to perform the mosaicking, first of all, an empty raster is created with the help of the Data Management tools of Arc Toolbox. In particular, of the Data management tools Raster option is selected, and an empty raster is created. Further, both the tiles are added in ArcMap with add data option, and the Mosaic option is selected from the Raster Dataset of Arc Toolbox. Both the tiles are provided as input in the Input Rasters option, and earlier created empty raster is provided as target raster option. Fig. 5 shows the final mosaicked image of both tiles.

3.2 Edge Detection

After performing mosaicking, a mosaicked image is used for the detection of edges. The Canny edge detection method has been chosen to detect the edges in the mosaicked image (Canny, 1986). The Canny edge detection includes noise reduction using Gaussian filtering, computing the depth gradient and finding the maximum localized edges, and finally tracing the detected edges to include the weaker gradients if they

exhibit natural extension to the strong edges. It finds a lot of edges in the mosaicked image beside the boundary edges of the river (Fig.6). These boundary edges exist on the sides of the river, which exhibits the highest point density across the whole scene. Canny edge detection technique includes all the thin and thick edges of the mosaicked image.

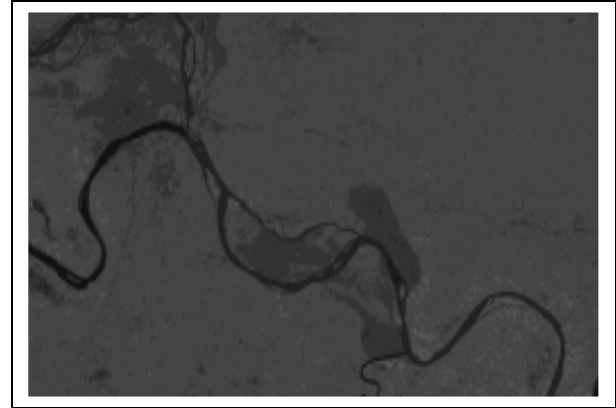


Fig. 5: Perspective view of the mosaicked image.

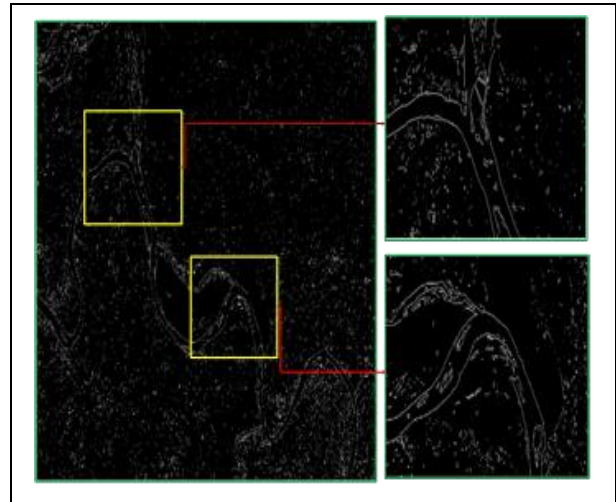


Fig. 6: Detected edges of mosaicked image.

3.3 Connected Component Analysis

Area-based connected component analysis is performed at detected edges. In order to perform the connected component analysis, an edge filtering process is used in which edges having less than a particular number of the connected neighborhood (no_nhs) are filtered out, and the remaining connected edges (having greater or equal to the threshold number of the connected neighborhood) are labeled with a unique integer number.

Further, an area-based constraint is applied at each label that the area of each label (L_{Ar}) should be greater than a particular threshold. After applying this constraint, all the edges except the longest connected edge are filtered out from the image.

4. RESULT & DISCUSSION

Two different parameters are used in the last step of the method. The used values of these parameters are shown in Table 2.

Table 2. Parameters and their used values in various steps of the proposed method.

Steps	Parameters	Used Value
Connected component analysis	number of the connected neighborhood (L_{Ar})	8
Connected component analysis	area of each label (L_{Ar})	0.009216km ²

The available option for a number of connected neighbors is four, eight, twenty-four, and so on. In order to remove smaller edges, eight numbers connected neighbors are chosen. In the case of twenty-four numbers of connected neighbors, some portion of the boundary edge of the river is filtered out. If four numbers of connected neighbors are chosen, in such case, many small edges which are not an area of interest remain. The total area covered in this study is 2404 kilometer²(km²), and the spatial resolution of the image is 24 meters, so in the case

of eight connected neighbors total connected area will be 0.005184 km². So, the area of each label should be greater than the area of eight connected neighbors and must be less than the area of twenty-four neighbors, which is 0.1444 km². Fig. 7 represents the detected boundary line after applying all the steps of the pipeline.

Mosaicking of the tiles is required manual processing in ArcGIS. The remaining steps of the method are coded and performed using Matlab2013a installed in standard PC (OS: Windows7: 64bit, CPU: Intel Core i3@2.4GHz, RAM: 3GB). The execution time of the proposed method is 19.92seconds; the time-tagged in mosaicking is excluded because it takes manual processing.

5. CONCLUSION & FUTURE RECOMMENDATION

In the present study, a method for river boundary detection is explained, and the method is tested at LISS-III satellite imaginary of Triveni Sangam region of Allahabad city, Uttar Pradesh, India. Results are generated on the optimized values of parameters listed in Table 2. Two different softwares, i.e., ArcGIS 10.3 and Matlab2013a, are used for processing the detailed method. The boundary edges of the river are detected. Future work will be focused on developing such methodologies to automatically determine the optimized value of employed parameters.

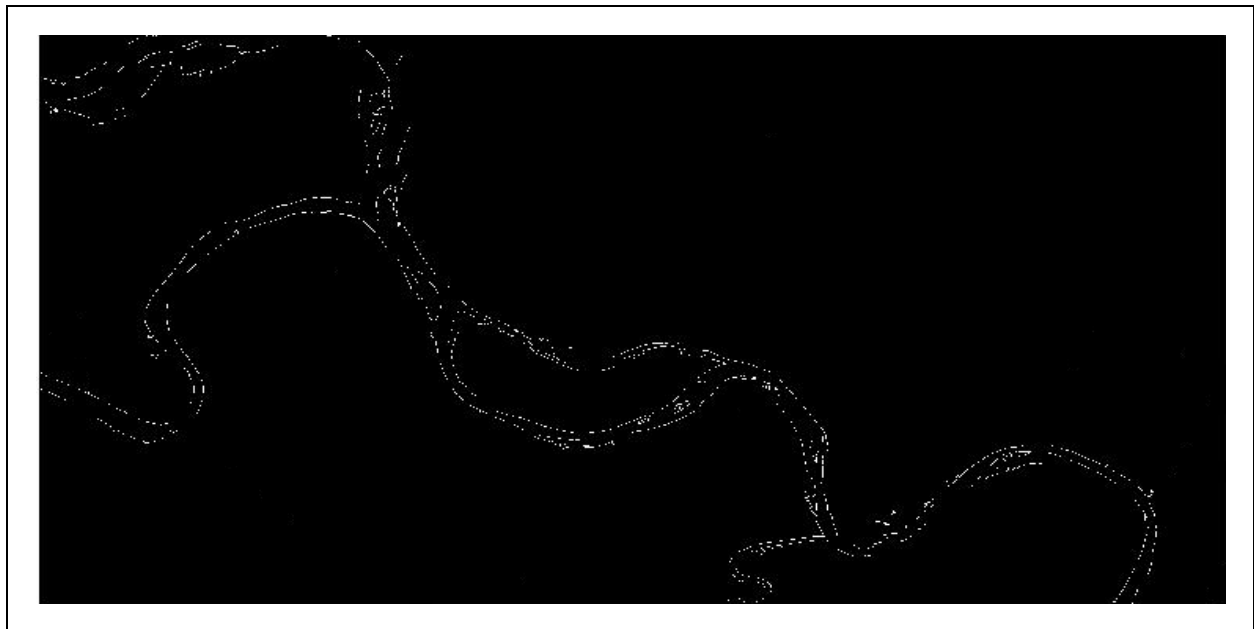


Fig. 7: Detected boundary edges of the river.

FUNDING

This research received no specific grant from any funding agency in the public, commercial, or not-for-profit sectors.

CONFLICTS OF INTEREST

The authors declare that there is no conflict of interest.

COPYRIGHT

This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC-BY) license (<http://creativecommons.org/licenses/by/4.0/>).



REFERENCES

- Benstead, J. P. and Leigh, D. S., An expanded role for river networks, *Nat. Geosci.*, 5(10), 678–67(2012).
<https://doi.org/10.1038/ngeo1593>
- Canny, J., A computational approach to edge detection, *Surveying Engineering, IEEE Trans. Pattern Analysis Machine Intelligence PAMI*, 8, 679–698 (1986).
- Dillabaugh, C. R., Niemann, K. O., Richardson, D. E., Semi-automated extraction of rivers from digital imagery, *GeoInformatica.*, 6(3), 263-284(2002).
<https://doi.org/10.1023/A:1019718019825>
- Güneralp, İ., Filippi, A.M., Hales, B.U., River-flow boundary delineation from digital aerial photography and ancillary images using support vector machines, *Gisci. Remote Sens.*, 50, 01–25(2013).
<https://doi.org/10.1080/15481603.2013.778560>
- Jiang, H., Feng, M., Zhu, Y., Lu, N., Huang, J. and Xiao, T., An automated method for extracting rivers and lakes from Landsat imagery, *Remote Sens.*, 6(6), 5067-5089(2014).
<https://doi.org/10.3390/rs6065067>
- Klemenjak, S., Waske, B., Valero, S. and Chanussot, J., Automatic detection of rivers in high-resolution SAR data, *IEEE J. Sel. Topics Appl. Earth Observ. Remote Sens.*, 5(5), 1364-1372(2012).
<https://doi.org/10.1109/JSTARS.2012.2189099>
- Lau, T. and Franklin, W. R., River network completion without height samples using geometry-based induced terrain, *Cartogr. Geogr.Inf. Sci.*, 40(4), 316-325(2013).
<https://doi.org/10.1080/15230406.2013.780785>
- Liu, Z., Khan, U. and Sharma, A., A new method for verification of delineated channel networks, *Water Resour. Res.*, 50(3), 2164–2175(2014).
<https://doi.org/10.1002/2013WR014290>
- Pai, N. and Saraswat, D., A geospatial tool for delineating streambanks, *Environ. Modell. Softw.*, 40, 151-159(2013).
<https://doi.org/10.1016/j.envsoft.2012.08.012>
- Pavelsky, T. M. and Smith, L.C., RivWidth: A software tool for the calculation of river widths from remotely sensed imagery, *IEEE Geosci. Remote Sens. Lett.*, 5(1), 70-73(2008).
<https://doi.org/10.1109/LGRS.2007.908305>
- Trigg, M.A., Bates, P.D., Wilson, M.D., Schumann, G., Baugh, C., Floodplain channel morphology and networks of the middle amazon river, *Water Resour. Res.* 48(10), W10504(2012).
<https://doi.org/10.1029/2012WR011888>
- Yang, K.; Smith, L. C., Supraglacial streams on the greenland ice sheet delineated from combined spectral-shape information in high-resolution satellite imagery, *IEEE Geosci. Remote Sens. Lett.*, 10(4), 801–805(2013).
<https://doi.org/10.1109/LGRS.2012.2224316>